


PRODUCT SPECIFICATIONS

A-CLASS

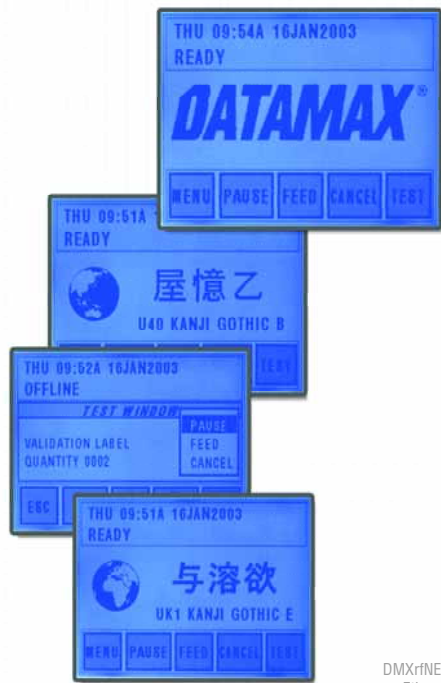

Graphic LCD Display

DMXrNet Wireless Ethernet Card



DMXNET Ethernet Card



Right-hand Model, Cover Open



Rear of Printer, Slide in Card Cage

DATAMAX A-CLASS STANDARD FEATURES:

- Right-handed printer
- Media peel bar
- 4MB FLASH downloadable program memory
- 16MB DRAM memory
- Two RS-232 serial interfaces, 9pin
- One IEEE 1284 compliant parallel interface
- One USB v1.1 interface
- RS422/RS485 Interface
- One applicator interface ports (15pin) with programmable inputs and outputs
- Graphics LCD control display with backlight

- EFIGS (English, French, Italian, German, and Spanish) LCD languages
- AGFA Scalable Font Engine with CG Triumvirate™ Scalable (regular and bold condensed) fonts
- Industry standard bar code symbologies
- Time and Date battery back up
- Static brushes
- Remote control front panel (36" maximum); connects to second serial port
- Host Computer accessible RAM/Flash memory for object temporary storage
- DPL command language

- Slide in style card cage
- Fault handling with reprint or void selection
- Parse error-tolerant command language interpretation
- Internal test labels for printhead verification, print quality validation, and internal configuration
- Resident multiple setup store and restore capability
- Time stamp at print capability
- Paper retract control after print
- Ribbon low detection and warning
- Power up diagnostics
- Resident option hardware diagnostics

- Diagnostic display and modes
- Media counters
- Front panel security
- Input line mode (ASCII text input) capability
- Option hardware auto-detection
- Scalable Font dynamic font attributes, bold and italics
- Firmware upgrades downloadable
- Audible Alert

SUPPORTED BARCODES: Code 3 of 9, UPC-A, UPC-E, Interleaved 2 of 5, Code 128, EAN-8, EAN-13, HIBC, Codabar, Plessey, UPC 2 and 5 digit addendums, Code 93, Postnet, UCC/EAN Code 128, Telepen, UPS MaxiCode, FIM, PDF417, USD-8, Datamatrix, QR Code, Aztec, TLC 39, Micro PDF417, RSS